



UbiBot GS1-AETH1RS-S Industrial-Grade (2.4GHz WIFI / RJ45) Temperature Humidity Light Data Logger IoT System

SKU: UBIGS1AETH1RSS
Manufacture Warranty period: 12 months
Country of Origin: China

Introduction

UbiBot® GS1-AETH1RS-S is an industrial-grade cloud-based environmental monitoring data logger. It supports WiFi and Ethernet 2 connection types; the RJ45 network cable port provides a more stable network connection. This model is embedded with internal temperature, humidity, and ambient light sensors. It detects environmental data all day round and automatically syncs all data to the UbiBot® IoT cloud platform, allowing you to access data and monitor the environment remotely from anywhere in the world via the free UbiBot APP or Web Console and to receive real-time alerts.

It also supports multiple 5V/12V RS485 external probes, but only one of each type can be connected at a time.

The clear 4" LCD screen allows you to view the latest data instantly.

The device supports three types of power supply: internal lithium battery, Type-C 5V (USB cable provided), and DC 12V/2A (included). The 2900mA lithium battery ensures a long working time.

The UBIBOT GS1-AETH1RS-S is unable to support the DS18B20-Audio Temperature Probe.

Features

- Built-in temperature, humidity, and ambient light sensors
- 2.4 GHz WiFi and RJ45 Ethernet 2 types of network connection, no need for hubs or gateways
- Industrial-grade shell, strong and durable
- 4" high-quality LCD screen displaying current environmental conditions
- Unlimited UbiBot cloud storage for historical data; free historical data export
- Multiple ways of receiving real-time alerts: App notifications, emails, phone calls, SMS, HTTP
- Working with IFTTT, Google Sheet, Alexa
- Supporting multiple RS485 external probes, but only one of each type can be connected at a time.
- Easy setup with free UbiBot App or PC tools
- Memory with a capacity of 300,000 records stores all data even if the network is temporarily disconnected, which ensures there are no gaps in the data history.
- Compliance with CE, EN 12830, FCC, FDA CFR21, IC, RCM, RoHS, TELEC



Note:

- GS1-AETH1RS-S only supports Ethernet switch with 100 Mbps or lower. Gigabit switching hub with auto-negotiation is also compatible.
- It supports multiple 5V RS485 external probes, but only one of each type can be connected at a time.
- Due to the RJ45 cable port, this version is not waterproof. The optimal operational environment is 10% to 90% RH. Long-term exposure to a high-humidity environment, over 90% RH, may cause damage to the device.
- For WiFi connection, GS1-AETH1RS-S can only work with a 2.4 GHz WiFi network. **5 GHz WiFi is not supported.**
- As the Ethernet connection consumes a lot of power, we recommend you connect the external power supply all the time to ensure a constant performance.

Application

- Online real-time detection of temperature, humidity, and light level
- Greenhouse
- Museum
- Wine Cellar
- Pharmacy
- Horticulture
- Animal Breeding Warehouse

External Probes & Accessories

With splitters, it supports multiple RS485 probes:

- TH30S-B Air Temperature and Humidity Probe
- Soil Temperature and Moisture Sensor
- PT 100 Industrial-grade Temperature Probe
- Wind Speed Sensor
- CO2 Probe
- Vibration Sensor

Package includes

1 x GS1-AETH1RSS device
1 x Manual book
1 x Type-C USB cable (1m)
1 x Singapore Safety Mark 12/2A Power Adapter

Specifications

Temperature	
Range:	-20°C to 60°C (-4°F to 140°F)
Typical Accuracy:	±0.3
Humidity	
Range:	10% to 90%, No condensation
Typical Accuracy:	±3%RH
Ambient Light	
Range:	0.01 to 83,000 lux
Typical Accuracy:	±2%

Operation System:	iOS 11+, Android 8.1+, or Windows 7+, or masOS v10.8+
Memory:	300,000 sensor records
WiFi Information:	Supports 20MHz or “Auto” setting supports OPEN, WEP, or WPA/WPA2 types, WPA2-Enterprise (802.1x / RADIUS authentication) network is not supported, requires 2.4GHz (802.11 b/g/n), channels 1-13 (5GHz WiFi NOT supported)
Ethernet Specification:	RJ45 Ethernet cable, Ethernet switch 100 mbps or lower
Screen Size	4”
Colour	White
Material	Flame resistant ABS+PC
Switch Type	Button
Power Source	Type C USB Cable
	DC 12V/2A Power Adapter
	Internal Lithium batteries 2900 mAh
Dimensions	11.5 x 9 x 5.5 cm
Weight	436g ± 3g



Temperature

Humidity

- Data sync via WiFi & RJ45 ethernet cable connectivity
- 24/7 temperature & humidity monitoring
- Multiple power supply methods
- Larger internal storage with up to 300,000 records
- No hub required



POE splitter is offered separately.



Ethernet cable





DC 5V-12V



Type-C USB cable (provided in the packaging)



The GS1-AETH1RS device consumes a lot of power for constant performance. So We recommend you plug it to any of the external power supplies, especially the first time switch it on.

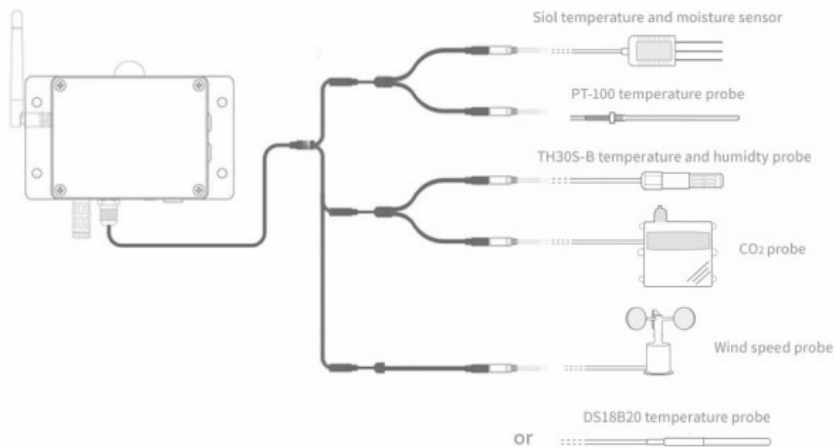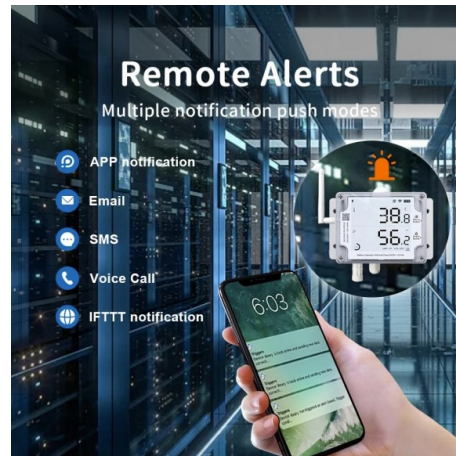

⚠ Supports up to 5 probes simultaneously, 1 of each type.



The cloud-based IoT platform

UbiBot® offers a revolutionary way to monitor environmental conditions where they matter. The sensors synchronize data to UbiBot® IoT Platform using WiFi, Cellular or Ethernet connection (depending on the specific model purchased). Users can then access data from anywhere via a smartphone or the Web console.

Features:

- **Data Management:** Manage all your IoT data in one place; you could add as many devices as you want to one UbiBot account.
- **Unlimited Storage:** Unlimited cloud-based storage ensures you will never run out of space. This allows you to view all your historical data via UbiBot App or Web.
- **Free App & Web Console:** Using UbiBot App and Web Console is free. Powerful and thoughtful features provide you brilliant experience.
- **Analysis and Visualization:** Use powerful analysis and visualization tools to get the most out of your data; spot trends and direct comparisons.
- **Real-Time Alerts:** Fully customizable alert system will notify you via App notifications, emails, phone call/SMS, HTTP whenever any metric goes out of the range preset.
- **Highly Secure Platform:** UbiBot IoT platform is designed to keep all your data secure so you never have to worry about hackers or other security issues.
- **Working with IFTTT, Alexa, Google Assistant, Google Sheet**
- Compliant with FDA CFR21

Details:

Real-time and history data

The UbiBot Platform is a cloud-based IoT platform where all measured data is uploaded and stored. UbiBot App and Web Console allow you to view current data as well as historical data in graphs.

Customizable alerts and bulk operation

Setting and receiving alerts on your devices helps you to get notified of the conditions timely. When you have many devices to manage, it's time-consuming to set each alert rule one by one. Therefore, we've developed a bulk operation module with which you can set the same rule for many devices at a time.

Data export

On UbiBot Platform, you can download the history data in CSV or PDF format. The CSV file only contains raw data, while the PDF file is a summarized report with average, maximum and minimum value within the chosen period. The PDF file is much easier to read and archive.

Device sharing and bulk operation

For business users, centralized control over multiple devices is available, with no limit on the number of devices in one account. Also available are bulk operations that apply to sensor settings, alerts, and remote control routines. Devices can be shared with other people, which allows for distributed management by different colleagues.

Intelligent automation in UbiBot platform

UbiBot is committed to building intelligent industrial and home ecosystems. By integrating temperature and humidity sensors and the smart plug SP1 in one system, automated operation is achieved through data linkage. For example, fans can be switched on when the temperature rises to 30 °C.


Data forwarding

UbiBot is an open platform that provides cloud-based services while supporting customers to use their own storage servers. With the data forwarding service, you can forward the data collected by your device to your own private URL to protect privacy.

Platform-based calibration

UbiBot platform supports data calibration both on the platform level as well as the device level. One-step calibration, instant display, no impact on historical data.


View Data from Mobile APP Dashboard

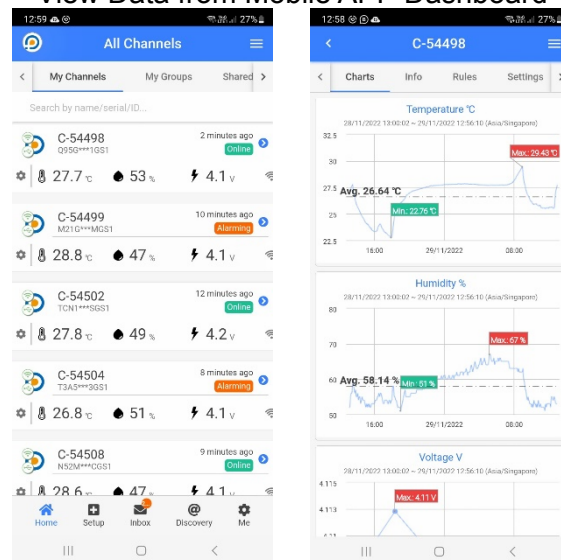



View Data from PC Dashboard

ID	Channel ID	Device ID	Reference	Power	Temperature	Humidity	Voltage	WiFi RSSI	Network	MAC Address	Created At	Updated At
C-54498	ubibot-gs1-aeth1rs	GMM-Showroom-Phone	36.13077146019	25.6	53.0	4.1	-45	109.1	629.6	30.2	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54499	ubibot-gs1-aeth1rs	GMM-Showroom-VISIPm	36.13077146019	26.6	53.0	4.1	-45	109.1	629.6	30.2	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54500	ubibot-gs1-aeth1rs	GMM-Showroom-GSD	36.13077146019	26.5	53.0	4.1	-45	109.1	629.6	30.2	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54501	ubibot-gs1-aeth1rs	GMM-CSD Controller	36.13077146019	OFF	6.6	0.0	11	15.0	25.0	23.4	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54502	ubibot-gs1-aeth1rs	C-54498	36.13077146019	26.6	53.0	4.1	-45	109.1	629.6	30.2	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54503	ubibot-gs1-aeth1rs	C-54499	36.13077146019	26.2	49.0	4.1	-37	104.3	326.9	31.2	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54504	ubibot-gs1-aeth1rs	C-54502	36.13077146019	25.1	51.0	4.2	01	85.7	378.6	30.6	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54505	ubibot-gs1-aeth1rs	C-54504	36.13077146019	27.6	54.0	4.1	-38	107.0	376.1	30.3	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54506	ubibot-gs1-aeth1rs	C-54505	36.13077146019	26.5	50.0	4.1	04	481.1	728.2	32.9	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)
C-54507	ubibot-gs1-aeth1rs	C-54511	36.13077146019	26.6	53.0	4.1	-45	109.1	629.6	30.2	10/11/2022 15:22:00 (Asia/Singapore)	10/11/2022 15:22:00 (Asia/Singapore)

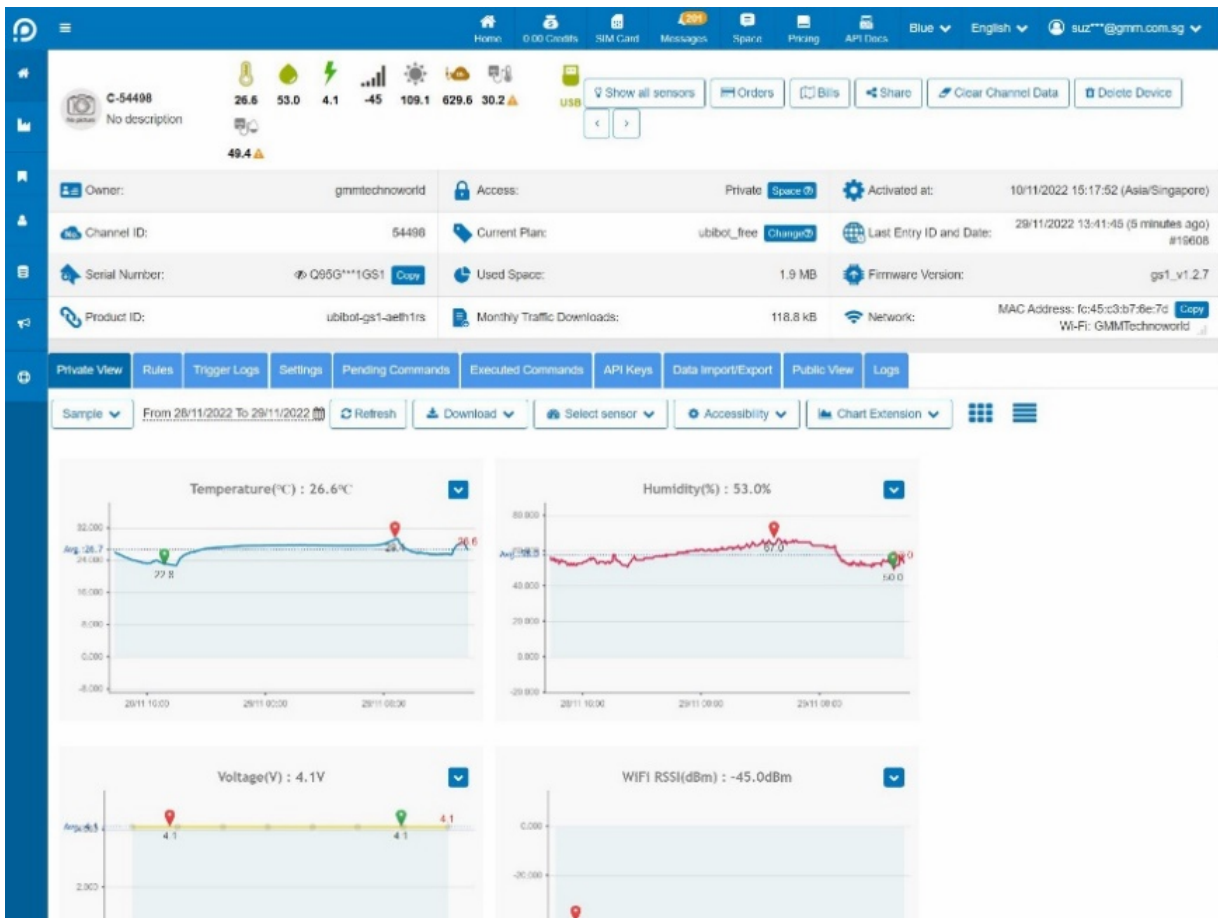



Download Data in Excel or PDF Format

created_at	field1 (Temperature °C)	field2 (Humidity)	field3(Light)	field4(Voltage)
2019-05-27T15:28:08+08:00	25.88121	60	81.639999	5
2019-05-27T15:28:10+08:00	25.894562	60	76.439995	5
2019-05-27T15:28:12+08:00	25.937286	61	76.919998	5
2019-05-27T15:28:14+08:00	25.937286	61	79.5	5
2019-05-27T15:28:15+08:00	25.96666	62	77.799995	5
2019-05-27T15:28:16+08:00	25.96666	62	75.919998	5
2019-05-27T15:28:18+08:00	26.006714	62	76.860001	5
2019-05-27T15:28:19+08:00	26.022736	62	77.720001	5
2019-05-27T15:28:25+08:00	26.121536	63	78.540001	5
2019-05-27T15:28:47+08:00	26.404594	60	97.439995	5
2019-05-27T15:28:51+08:00				
2019-05-27T15:29:47+08:00	26.615547	58	78.939995	
2019-05-27T15:30:47+08:00	26.658272	58	86.559998	
2019-05-27T15:31:47+08:00	26.700996	57	96.839996	
2019-05-27T15:32:47+08:00	26.700996	57	84.479996	
2019-05-27T15:33:47+08:00	26.743721	57	83.279999	

Data Report

Channel Name: GMM Showroom Freezer 1

Data Start: 01/05/2023 00:00:00 to 30/05/2023 00:00:00

Report Generated: 31/05/2023 18:57:59

The current data transmission has been truncated, there are 8000 pieces of data in total.

Timezone: Asia/Singapore

Device Information

Channel Name: GMM Showroom Freezer 1	Permission: Public	Activated at: 10/02/2023 15:19:55
Channel ID: 59273	Plan ID: ubitbot_free	Last Entry: 31/05/2023 18:54:49
Serial: D829W4W5C1	Storage Used: 16.99 MB	Firmware: v1.1
Product ID: ubitbot-w1	Download Traffic: 583.97 kB	WiFi SSID: GMMTechnoworld

Data Summary

Sensor	Maximum	Minimum	Average
Temperature(°C)	32.82	22.52	28.65
Humidity(%)	68.00	45.00	57.81
Light(lux)	366.24	0.08	101.81
Voltage(V)	5.00	5.00	5.00

1 of 192

Data Report-GMM Showroom Freezer 1[CHANNEL ID:59273] File Created: 31/05/2023 18:58:12

Sensor	Maximum	Minimum	Average
WiFi RSSI(dBm)	-23.00	-43.00	-28.11
External Temperature Probe(°C)	7.81	-25.31	-19.02

2 of 192

Data Report-GMM Showroom Freezer 1[CHANNEL ID:59273] File Created: 31/05/2023 18:58:12

GMM Showroom Freezer 1[Channel ID: 59273] Temperature(°C)

Entry	Created At	Temperature	Entry	Created At	Temperature
1	01/05/2023 00:03:56	30.49	46	01/05/2023 03:38:59	30.59
2	01/05/2023 00:08:55	30.59	45	01/05/2023 03:43:59	30.52
3	01/05/2023 00:13:55	30.56	46	01/05/2023 03:48:59	30.50
4	01/05/2023 00:18:56	30.53	47	01/05/2023 03:53:59	30.55
5	01/05/2023 00:23:56	30.59	48	01/05/2023 03:58:59	30.55
6	01/05/2023 00:28:56	30.50	49	01/05/2023 04:03:59	30.53
7	01/05/2023 00:33:56	30.46	50	01/05/2023 04:08:59	30.69
8	01/05/2023 00:38:56	30.55	51	01/05/2023 04:13:59	30.65
9	01/05/2023 00:43:56	30.56	52	01/05/2023 04:18:59	30.66
10	01/05/2023 00:48:56	30.50	53	01/05/2023 04:23:58	30.73
11	01/05/2023 00:53:56	30.62	54	01/05/2023 04:28:58	30.73
12	01/05/2023 00:58:56	30.59	55	01/05/2023 04:33:58	30.71
13	01/05/2023 01:03:56	30.53	56	01/05/2023 04:38:59	30.80
14	01/05/2023 01:08:56	30.59	57	01/05/2023 04:43:59	30.73
15	01/05/2023 01:13:56	30.45	58	01/05/2023 04:48:59	30.74
16	01/05/2023 01:18:56	30.45	59	01/05/2023 04:53:59	30.84
17	01/05/2023 01:23:57	30.57	60	01/05/2023 04:58:59	30.76
18	01/05/2023 01:28:57	30.50	61	01/05/2023 05:03:59	30.74
19	01/05/2023 01:33:57	30.49	62	01/05/2023 05:08:59	30.81
20	01/05/2023 01:38:57	30.59	63	01/05/2023 05:13:59	30.77
21	01/05/2023 01:43:57	30.49	64	01/05/2023 05:18:59	30.77
22	01/05/2023 01:48:57	30.46	65	01/05/2023 05:23:59	30.89
23	01/05/2023 01:53:57	30.53	66	01/05/2023 05:28:59	30.74
24	01/05/2023 01:58:57	30.43	67	01/05/2023 05:33:59	30.70
25	01/05/2023 02:03:57	30.43	68	01/05/2023 05:38:59	30.77
26	01/05/2023 02:08:57	30.56	69	01/05/2023 05:44:00	30.73
27	01/05/2023 02:13:57	30.53	70	01/05/2023 05:49:00	30.70
28	01/05/2023 02:18:57	30.50	71	01/05/2023 05:54:00	30.86
29	01/05/2023 02:23:58	30.56	72	01/05/2023 05:59:00	30.73
30	01/05/2023 02:28:58	30.50	73	01/05/2023 06:04:00	30.65
31	01/05/2023 02:33:58	30.45	74	01/05/2023 06:09:00	30.73
32	01/05/2023 02:38:58	30.55	75	01/05/2023 06:14:00	30.67
33	01/05/2023 02:43:58	30.50	76	01/05/2023 06:19:00	30.67
34	01/05/2023 02:48:58	30.52	77	01/05/2023 06:24:00	30.77
35	01/05/2023 02:53:58	30.63	78	01/05/2023 06:29:00	30.73
36	01/05/2023 02:58:58	30.55	79	01/05/2023 06:34:00	30.67
37	01/05/2023 03:03:58	30.47	80	01/05/2023 06:39:00	30.74
38	01/05/2023 03:08:58	30.55	81	01/05/2023 06:44:01	30.65
39	01/05/2023 03:13:58	30.49	82	01/05/2023 06:49:01	30.65
40	01/05/2023 03:18:58	30.50	83	01/05/2023 06:54:01	30.81
41	01/05/2023 03:23:59	30.60	84	01/05/2023 06:59:01	30.73
42	01/05/2023 03:28:59	30.56	85	01/05/2023 07:04:01	30.70
43	01/05/2023 03:33:59	30.50	86	01/05/2023 07:09:01	30.77

6 of 192